



K A C O



new energy.

Data sheet

Powador

12.0 TL3 | 14.0 TL3

18.0 TL3 | 20.0 TL3



## Turn your roof into a power station.

The transformerless, three-phase inverters Powador 12.0 TL3 to 20.0 TL3.

Photovoltaic systems of up to several hundred kilowatts can be designed extremely flexibly in small, highly efficient units with the transformerless, three-phase Powador 12.0 TL3 to 20.0 TL3 inverters.

They operate using two separate MPP trackers that can handle both symmetrical and asymmetrical loads to allow for optimum adjustment. This allows for all typical requirements of complex designs to be fulfilled; on the one hand, for example, full configuration of an east/west-facing roof (symmetrical load) or, on the other hand, the regular configuration of a south-facing roof without having to dispense with the solar yield of a dormer (asymmetrical load). The MPP trackers can also be connected in parallel: installation costs less (you do not need an additional external disconnector) when strings need to be combined before the

inverter. Two strings can be connected per MPP controller, i.e. 4 strings for each unit.

The input voltage range is particularly broad: the inverters switch to the grid from 250 V, and, when in operation, they still feed in at 200 V. This means that solar yields are optimum for comparatively small areas such as dormers or carports but they also operate for more of the day. The compact design with the DC connection via solar connectors makes installation very easy and economical.

It is easy to achieve perfect communication with these units. They are fitted with an integrated data logger with web server, a graphical display for showing operating data and a USB port for installing firmware updates. The current software can be downloaded free of charge from the download area of our homepage.

The yield data can be called from the web server or via USB for evaluation. The integrated data logger can also be connected directly to an internet portal for professional evaluation and visualisation of the inverter data.

A number of country-specific default settings are programmed into the inverters. These are easy to select during on-site installation. The interface language can be selected separately.

And, if you want to use your self-generated solar power in your own home, the Powador 12.0 TL3 to 20.0 TL3 also come with our Priwatt function for managing self-consumption.



# Technical data

Powador 12.0 TL3 | 14.0 TL3 | 18.0 TL3 | 20.0 TL3

Electrical data	12.0 TL3	14.0 TL3
<b>DC input</b>		
MPP range@P <sub>nom</sub> <sup>1)</sup>	280 V ... 800 V	350 V ... 800 V
Operating range	200 V - 950 V	200 V - 950 V
Min. DC voltage/start voltage	200 V / 250 V	200 V / 250 V
No-load voltage	1000 V	1000 V
Max. input current	2 x 18.6 A	2 x 18.6 A
Number of MPP trackers	2	2
Max. power/tracker	10.2 kW	12.8 kW
Number of strings	2 x 2	2 x 2
<b>AC output</b>		
Rated output (@230 V)	10 000 VA	12 500 VA
Line voltage	acc. to local requirements	acc. to local requirements
Rated current	3 x 14.5 A	3 x 18.1 A
Rated frequency	50 Hz/60 Hz	50 Hz/60 Hz
cos phi	0.80 inductive ... 0.80 capacitive	0.80 inductive ... 0.80 capacitive
Number of grid phases	3	3
<b>General electrical data</b>		
Max. efficiency	98.0 %	98.0 %
Europ. efficiency	97.5 %	97.6 %
Night consumption	1.5 W	1.5 W
Circuitry topology	transformerless	transformerless
<b>Mechanical data</b>		
Display	graphical display + LEDs	graphical display + LEDs
Control units	4-way navigation + 2 buttons	4-way navigation + 2 buttons
Interfaces	Ethernet, USB, RS485, S0 output, digital input „inverter off“	Ethernet, USB, RS485, S0 output, digital input „inverter-off“
Fault signalling relay	potential-free NOC max. 230 V / 1 A	potential-free NOC max. 230 V / 1 A
Connections	DC: solar connector AC: cable connection M40 and terminal (max. cross-section: 16 mm <sup>2</sup> )	DC: solar connector AC: cable connection M40 and terminal (max. cross-section: 16 mm <sup>2</sup> )
Ambient temperature	-25 °C ... +60 °C <sup>2)</sup>	-25 °C ... +60 °C <sup>2)</sup>
Cooling	temperature-dependent fan	temperature-dependent fan
Protection class	IP65	IP65
Noise emission	< 52 dB(A)	< 52 dB(A)
DC switch	integrated	integrated
Casing	aluminium casting	aluminium casting
H x W x D	690 x 420 x 200 mm	690 x 420 x 200 mm
Weight	40 kg	40 kg
<b>Certifications</b>		
Safety	IEC 62109-1/-2, EN 61000-6-1/-2/-3/-4, EN 61000-3-2/-3	IEC 62109-1/-2, EN 61000-6-1/-2/-3/-4, EN 61000-3-11/-12
Grid compliance	VDE 0126, C10/11, VDE-AR-N 4105, BDEW, G83-2, G59/3, IEC 61727, IEC 62116, CEI-016, EN 50438, ... for more see homepage/download area	

Conforms to the country-specific standards and regulations according to the country version that has been set.  
<sup>1)</sup> by symmetrical assignment of both MPP trackers. <sup>2)</sup> Power derating at high ambient temperatures.

18.0 TL3	20.0 TL3
420 V ... 800 V	470 V ... 800 V
200 V - 950 V	200 V - 950 V
200 V / 250 V	200 V / 250 V
1000 V	1000 V
2 x 18.6 A	2 x 18.6 A
2	2
14.9 kW	14.9 kW
2 x 2	2 x 2
15 000 VA	17 000 VA
acc. to local requirements	acc. to local requirements
3 x 21.8 A	3 x 24.6 A
50 Hz/60 Hz	50 Hz/60 Hz
0.80 inductive ... 0.80 capacitive	0.80 inductive ... 0.80 capacitive
3	3
98.0 %	97.9 %
97.7 %	97.6 %
1.5 W	1.5 W
transformerless	transformerless
graphical display + LEDs	graphical display + LEDs
4-way navigation + 2 buttons	4-way navigation + 2 buttons
Ethernet, USB, RS485, S0 output, digital input „inverter off“	Ethernet, USB, RS485, S0 output, digital input „inverter off“
potential-free NOC max. 230 V / 1 A	potential-free NOC max. 230 V / 1 A
DC: solar connector AC: cable connection M40 and terminal (max. cross-section: 16 mm <sup>2</sup> )	DC: solar connector AC: cable connection M40 and terminal (max. cross-section: 16 mm <sup>2</sup> )
-25 °C ... +60 °C <sup>2)</sup>	-25 °C ... +60 °C <sup>2)</sup>
temperature-dependent fan	temperature-dependent fan
IP65	IP65
< 52 dB(A)	< 52 dB(A)
integrated	integrated
aluminium casting	aluminium casting
690 x 420 x 200 mm	690 x 420 x 200 mm
44 kg	44 kg
IEC 62109-1/-2, EN 61000-6-1/-2/-3/-4, EN 61000-3-11/-12	IEC 62109-1/-2, EN 61000-6-1/-2/-3/-4, EN 61000-3-11/-12
VDE 0126, C10/11, VDE-AR-N 4105, BDEW, G83-2, G59/3, IEC 61727, IEC 62116, CEI-016, EN 50438, ... for more see homepage/download area	VDE 0126, C10/11, VDE-AR-N 4105, BDEW, G83-2, G59/3, IEC 61727, IEC 62116, CEI-016, EN 50438, ... for more see homepage/download area

Conforms to the country-specific standards and regulations according to the country version that has been set.  
<sup>1)</sup> by symmetrical assignment of both MPP trackers. <sup>2)</sup> Power derating at high ambient temperatures.



Powador  
12.0 TL3 | 14.0 TL3  
18.0 TL3 | 20.0 TL3

Up to 98.0% efficiency

2 MPP trackers, symmetrical  
and asymmetrical loading possible


Multilingual menu and  
graphical display

Data logger with web server


Priwatt function for the self-  
consumption of solar power

## Graphical Display of efficiency

3D efficiency diagram for Powador 18.0 TL3

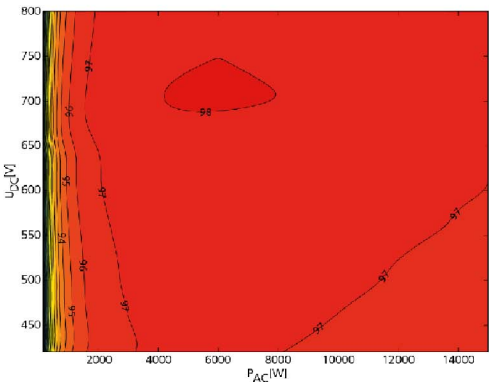

Efficiency characteristic curve for Powador 18.0 TL3

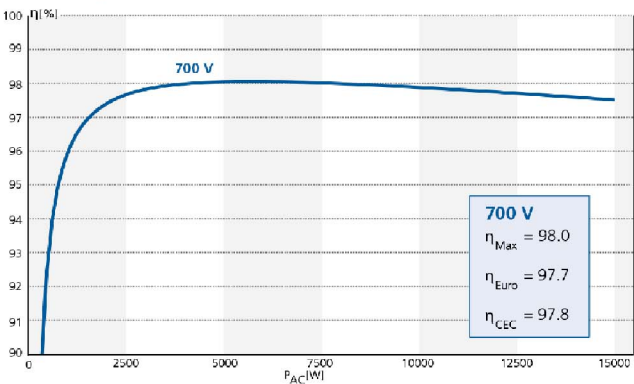

Your retailer